

Aluminium TLS Preset Torque Screwdrivers

Torque range from 0.02 to 13.6 N.m

A range of compact aluminium preset torque screwdrivers, each of which delivers the correct torque accurately and repeatedly.

The models in this range include: TLS 0022, Minor, Standard & TLS 1360. Technical details of all models are given on pages 18-21.

All tools are also available with One Way (O/W) clockwise torque and anti clockwise torque.

These durable, versatile and lightweight tools can be used for Assembly, Maintenance and Servicing in any engineering or manufacturing environment.



Lightweight, high quality TLS Preset Torque Screwdriver range

Absolute accuracy and consistency. Accurate process control is ensured by eliminating under and over tightening due to the proven slipping mechanism


Ease of use. Tools can be used by operators at any skill level, due to unique slipping mechanism

Improved production quality. Accurate torque application reduces the likelihood of warranty and rework

Increased production efficiency. Lightweight aluminium construction and smooth reset action of the tools increase production efficiency by reducing operator fatigue

Long tool life. High quality, robust construction

Operational versatility. These versatile tools are ideal for a wide range of applications, with wide torque range and one way slipping action option

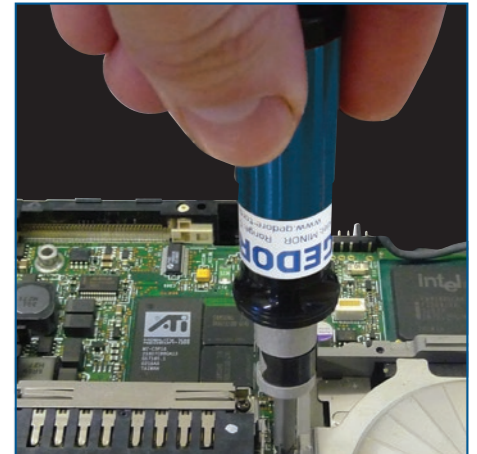

Slipping Mechanism
Incorrect tightening is impossible



TLS 0022 MICRO

TLS 0022 FH



Additional features

For more information on ESD compliant versions. **See page 25**

Comprehensive range of Accessories, Bits and Blades. **See pages 88-89**

TLS Screwdrivers can be customised to your exacting requirements. **See page 83**

| Order Code | Model | Range | | Drive | k mm | g | Repeatability | ISO 6789 Class | Colour |
|------------|-------------------|-----------|---------------|-------|------|-----|---------------|----------------|--------|
| | | ISO | Imperial | | | | | | |
| 015000 | TLS 0022 Micro FH | 4-22 cN.m | 5.7-32 ozf.in | | 76 | 050 | +/- 6% | 2F | Blue |
| 015080 | TLS 0022 FH | 2-22 cN.m | 2.8-32 ozf.in | | 104 | 072 | +/- 6% | 2F | Blue |
| 015085 | TLS 0022 FH O/W | 2-22 cN.m | 2.8-32 ozf.in | | 116 | 085 | +/- 6% | 2F | Blue |

For more information: Tool Selector; gedore-torque.com/tool-selector Telephone; +44 (0) 1483 894 476
Videos; www.youtube.com/gedore-torque Email; salesandrepairs@gedore-torque.com

